



Louvered Bollard Series

Photo above shows 70w HPS, rooted 1.1m RAL 9006 Grey Finish.

Functional Bollards offered in various heights to 3m, rooted or flanged. Suitable for paths, gardens or plaza areas.



Construction: Cast aluminium, IP54.
1.1m high, other heights on request (up to 3m). Flanged mounted version as standard, rooted version on request.

Lens: Borosilicate glass as standard with HID versions, Acrylic with CFL versions. Polycarbonate on request, max 50w.

Lamp Access: Remove lamp module.

Installation: Supplied in 3 parts - lamp module, cylinder and base. Base is fixed to a mounting surface before adding remaining modules.


Finish: Grey (RAL 9006) as standard. Other colours on request.

Lamps: To 70w HPS & 70w MH, 26w CFL.

Options: Different Heights on Request, Emergency option available with CFL version.



DIMENSIONS

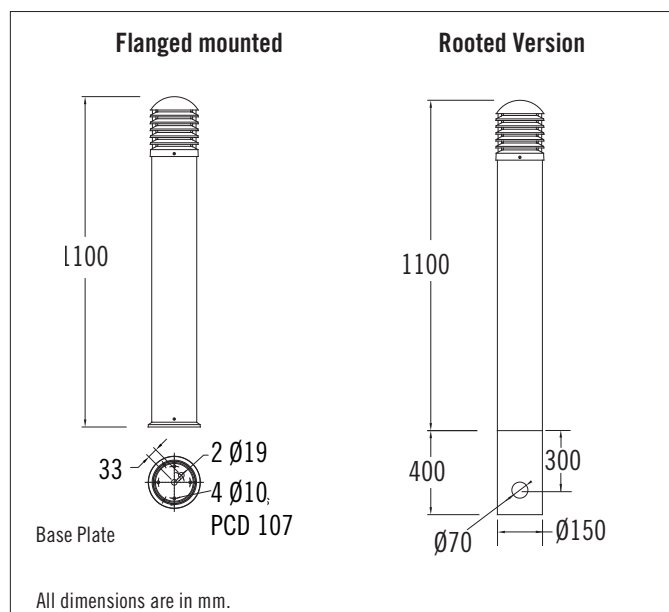

ORDERING CODE

Code Flanged	Code Rooted	Type	Details
5BLL60C-A	5BLL60C-C	26w TC-T/E	1.1m High Bollard, Gx24q-3
5BLL11S-A	5BLL11S-C	70w HPS-E/I	1.1m High Bollard, E27
5BLL11H-A	5BLL11H-C	70w MH	1.1m High Bollard, E27

APPLICATION GUIDE


Louvered Bollard

Standard height

70w HPS

Contours in Lux

M. Factor = 0.87



OPTIONS

RAL: Pls specify

HGT: Pls specify Height

EM: Emergency

PC: Polycarbonate Lens

OCC: Occupancy Sensor

(CFL version only)

