



Uni Series

External lighting



Architecturally designed pole top luminaire.

Construction: Cast aluminium mounting piece, with Polycarbonate lid and conical diffuser. Driver and LED optics included in top section. IP66.

Lens/Diffuser: Clear impact resistant acrylic, vandal resistant.

Installation: Via screws, on pole top with 60mm diameter. Adapter to suit 76mm pole available on request.

Finish: Dark Grey RAL 7016 as standard. Other colours on request.


LED: 18w, 36w or 70w LED. 4K as standard. Asymmetric or Symmetric Optics.

Recommended Mounting Height: 3m- 5m

Product Compliance: EN 60598.

DIMENSIONS

All Dimensions are in mm.

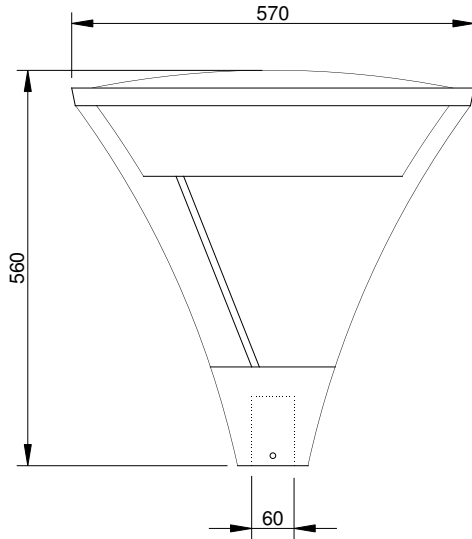

APPLICATION GUIDE


Uni Series

4m height

70w Symmetric

Contours in lux

M.Factor = 0.9



ORDERING CODE

Wattage	Type	Code	Details	Lumens
18w	LED	5UNI020LG	Pole top Luminaire	2080 lm
36w	LED	5UNI040LG	Pole top Luminaire	3940 lm
70w	LED	5UNI080LG	Pole top Luminaire	7880 lm

OPTIONS

RAL: Pls Specify

P76: Adapter for 76mm Pole